

PIOTR WOJTAS  
ARTUR KOZŁOWSKI  
MAREK WOJTAS

## Digitization of Polish mining industry by reducing costs and improving safety and quality of finished product

*This paper presents the current level of digitization of the Polish mining industry on examples of copper and hard coal mines. A proposal to digitize the individual business processes in mining production was presented. Six basic components were defined: mineral deposit management, SOP (Sales and Operation Planning), production, machines, security, and analyses. These components define the specifics of the functioning of the mining process. New methods of collecting and processing data based on Big Data technology were proposed.*

Key words: *digitization, Big Data, safety, smart mine, Industry 4.0*

### 1. INTRODUCTION

---

The restructuring of the Polish mining industry falls in the time of a new industrial revolution called Industry 4.0. Industry 4.0 sets a lot of store by the use of digital technologies, such as cloud computing, Big Data, or the Internet of things. The digital transformation of the economy is not only the condition of competitive efficiency but is slowly becoming a requirement to survive for Polish industrial organizations that compete for customers on a global scale.

In the global mining industry, mine management is carried out based on information acquired in real time. Data collecting from on-line measurements of the production processes and their analysis is one of Industry 4.0's attributes [1].

In the Polish mining industry, one can observe a dramatic increase in data acquired from technical systems and, on the other hand, increasing requirements concerning better management efficiency and work safety.

The majority of data acquired from technical systems is used only in systems that deal with measurements, monitoring the current state of the device, or

parameters of the environment/process. Historical data is stored but used only occasionally (only to explain or analyze a particular event). This data is distributed and non-integrated, which makes it difficult or even impossible to conduct multi-criteria analyses or find mutual relationships between processes and events.

### 2. EXPERIENCE AND COMPETENCE

---

The partner companies of the CNP EMAG Group provide mines with devices, apparatuses, and measurement systems for conducting measurements within the range of:

- geophysics,
- gas measurement,
- mineral quality analysis.

In addition, the CNP EMAG partner companies provide telecommunication solutions for communication, alarms, and underground data transmission as well as the monitoring of the mining processes, personnel, and machines [2]. Thus, it is possible to say

that the companies of the group have special competence and skills to develop and implement a system to collect, process, and analyze data from monitoring and control systems in real time.

Thanks to the use of sensors and advanced analytics, it will be possible to define suggestions and recommendations on how to improve business processes and regulations. This will result in higher production efficiency and better miner safety.

The developed system should provide a full picture of the supply chain, starting from deposit management and mining through coal preparation to its sale to customers. In addition, data analyses should enable us to optimize the energy and material efficiency of the production processes.

The results of a correlation analysis of machine parameters such as its motor rotations, temperature, and vibrations can be used to react to certain events and carry out prevention repairs. This will allow us to avoid unplanned work interruptions and ensure business continuity, which will positively impact mining output and reduce exploitation costs.

According to many experts, the Polish mining industry will achieve significantly higher management efficiency and better safety by employing information and communication technologies [3].

The digitization of the mining industry will allow us to achieve the assumed goals, provided that the competence and experience of the R&D staff of the CNP EMAG Group are combined with the best practices in the realm of mining processes and the available ICT (which have been successfully employed in many international mining corporation).

### 3. MINING DIGITIZATION CONCEPT

The results of R&D work that has been conducted for several years by the companies of the CNP EMAG Group have made it possible to define the Smart Mine Program, which is oriented towards the digitization of production management and safety in the mine [4].

While defining the program, the current digitization state of mining production was taken into account. This state is characterized by a lack of real co-operation between the business processes [3]. The following concerns have been observed:

- the employed ICT applications are isolated and distributed, and they come from many producers,
  - there is not a model of integrated data coming from technical monitoring and control systems,
  - many individualized Excel sheets are used, which results in a lack of data unification and synchronization,
  - it is necessary to unify, collect, and consolidate data so it could be accessible in due time according to the requirements to make decisions in the realm of mining production.
- The defined Smart Mine Program combines the following suggestions:
- an individual approach of CNP EMAG specialists to mining production through business processes, from the point of view of ICT,
  - a solution that is a balance between modern technology and its possible application with respect to the existing conditions (political, human, and technological),
  - using the knowledge of the personnel and a huge amount of collected data to find solutions that support current business processes but do not interfere with them,
  - cooperation of companies from the mining environment with Polish mining corporations KGHM, PGG, and JSW in order to achieve success together,
  - implementation of particular ICT solutions developed by different service and technology providers.
- The key feature of the program is its interoperability. The products of the program will be able to function in compliance with other products or systems that already exist or may exist with no implementation restrictions [5].
- The interoperability of the program will be achieved by securing the following goals:
- legal interoperability – in cooperation with certification bodies and the State Mining Authority in order to identify real solutions, certify them, and employ in mining,
  - business interoperability – coordination of business processes and rules in the management range covered by the program,
  - information and semantic interoperability – identifying a real information system with an unequivocal interpretation of data by systems used in the management range,
  - technical interoperability – cooperation of many machines and devices with the use of the Internet of things, in compliance with the assumptions of the Industry 4.0 concept.

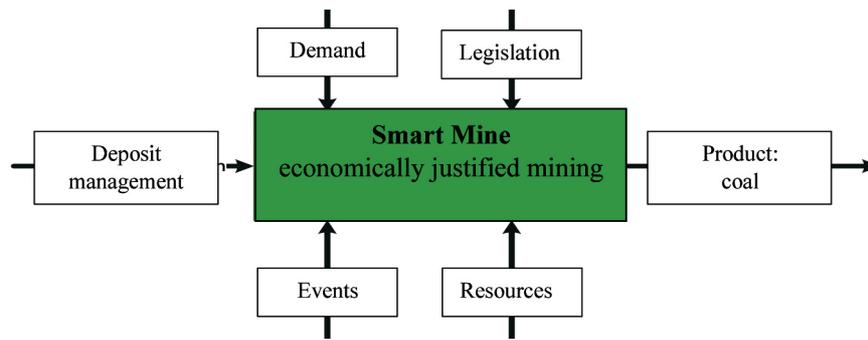


Fig. 1. Idea of Smart Mine Program

Figure 1 features the idea of the Smart Mine Program. It shows that the digitization of a mine should support the economically justified mining of minerals (in light of the existing demand and valid legal regulations) by means of the rational exploitation of the deposit and efficient use of resources, with respect to the existing natural hazards [6].

It is assumed that the program will be an important contribution to the transformation process of a mining management system.

In the course of the conducted work, the following specific tasks of the program were defined:

- higher efficiency of mining production management,

- better work safety,
- reduced production costs – not only in absolute values, but also as a percentage of product sales prices (coal, copper, and other mineral resources),
- better quality of the final product delivered to customers.

The digitization of the production management range and mine safety must be oriented towards key business processes taking place in a mine.

The business processes of a mining corporation are depicted in Figure 2, while Figure 3 shows which processes will be covered by the program.

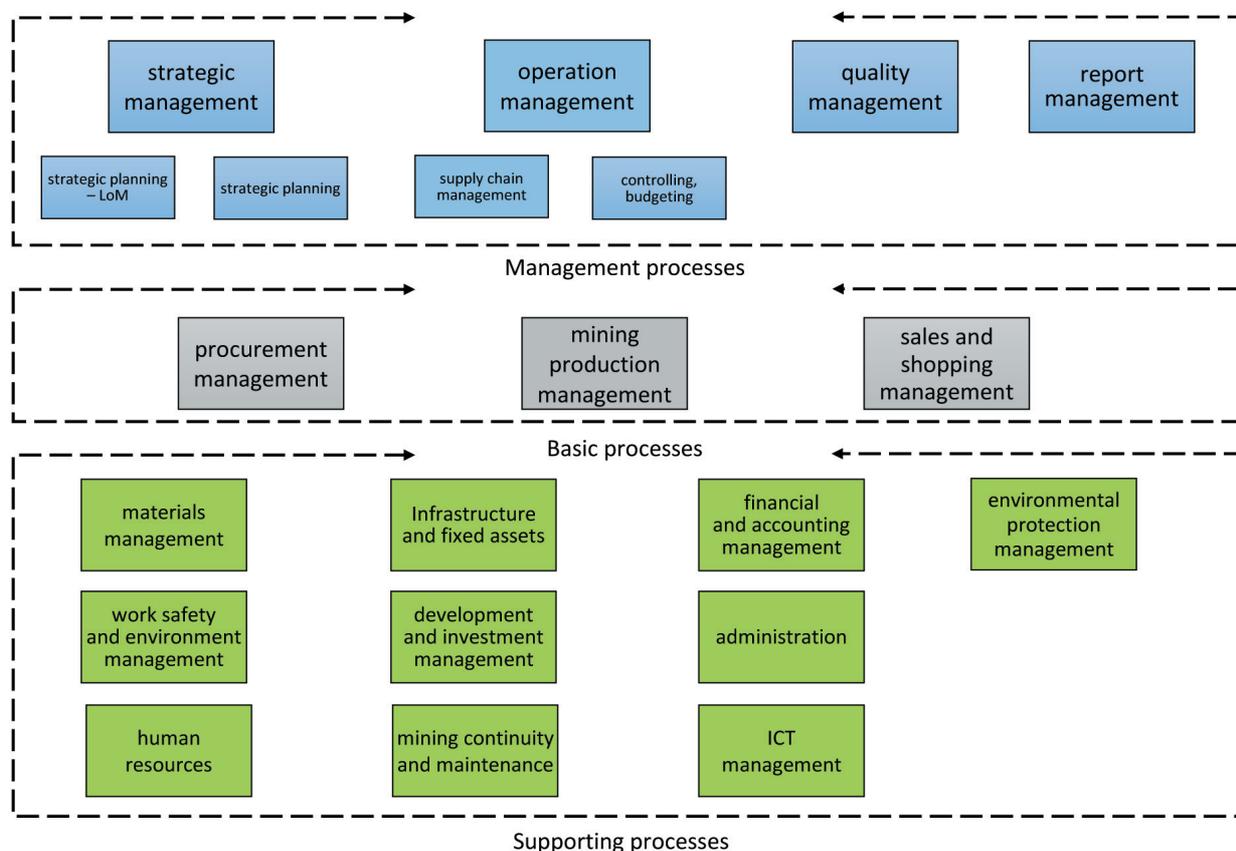


Fig. 2. Processes of mining corporation

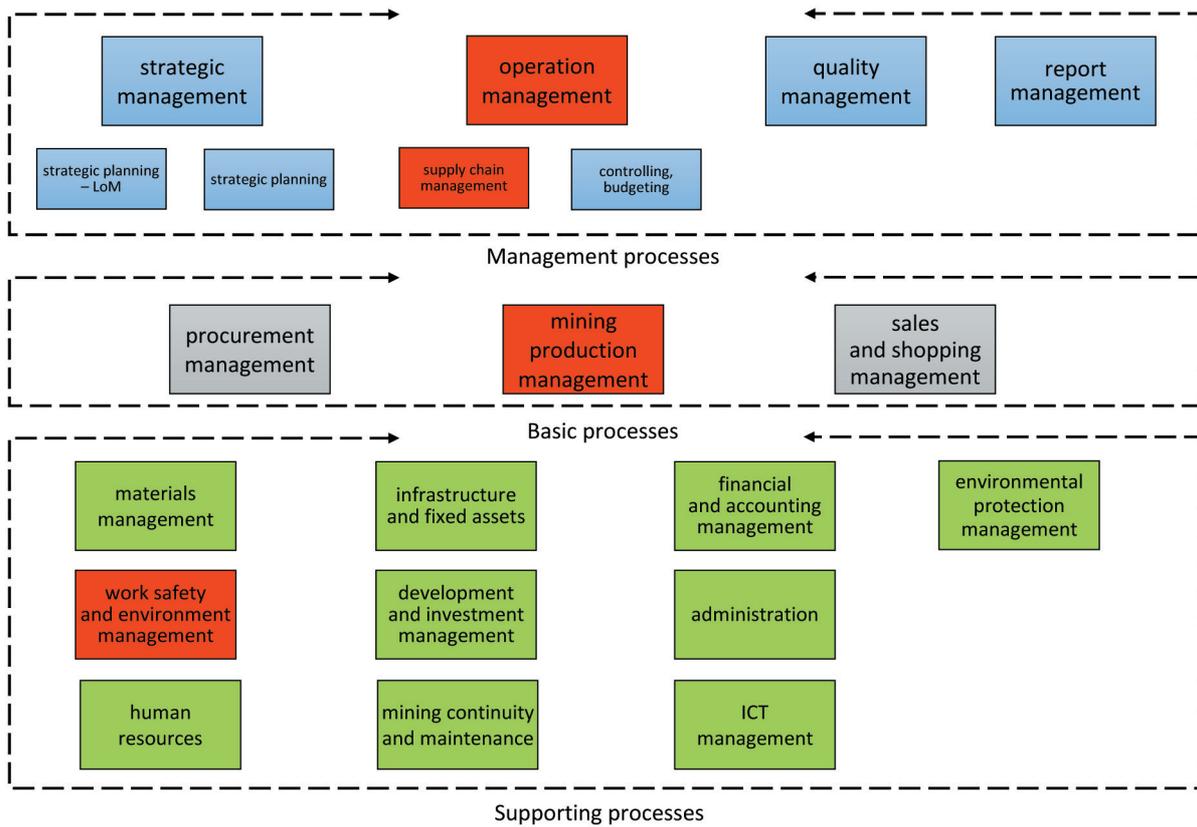


Fig. 3. Business processes covered by the Program – red color

It is important to note that the management processes and many functionalities of the other processes are conducted on the management level of the whole mining corporation, not only in the particular mines that are a part of it. Additionally, many of these functionalities are already supported by IT application systems; e.g., SZYK 2. The core of the program is the digitization of the business processes presented in Figure 3 [5].

These processes are marked in red, while the processes intensively supported by currently used IT systems and included in the program are marked with red shadows.

It was assumed that the program would encompass six functional components:

- Component 1 – Deposit/range: Deposit Management,
- Component 2 – SOP/range: Sales and Operation Planning – Supply Chain Management,
- Component 3 – Production/range: Mining Production Management,
- Component 4 – Machines/range: Infrastructure, Mining Continuity, and Maintenance,
- Component 5 – Safety/range: Safety Management,
- Component 6 – Analytics/range: TAS – Technical Analysis System.

Figure 4 presents the structure of the program and business processes related to the program components.

Each component of the program is strictly defined by the functionalities of the specific business processes. The program components will be developed as a result of the particular projects. One can assume that the functional range of a component will be worked out by one or several related projects.

It was assumed that particular functional components of the program would be developed by Poland's leading academic centers and institutes of the Polish Academy of Sciences as well as by the research institutes and companies working for the mining industry that have proper competence both in mining and ICT, the leading producers of mining machines, and the CNP EMAG Group.

Detailed functionalities of the components should be defined during the program-preparation phase. This work should be performed by previously selected contractors. It is important to note that, in the situation when the program is carried out by many contractors, it is necessary to ensure coherence with a view to achieving the program's objective.

The coherence of the solution will be ensured by the steering committee in charge of project management and by a model of business processes related to the area covered by the program.

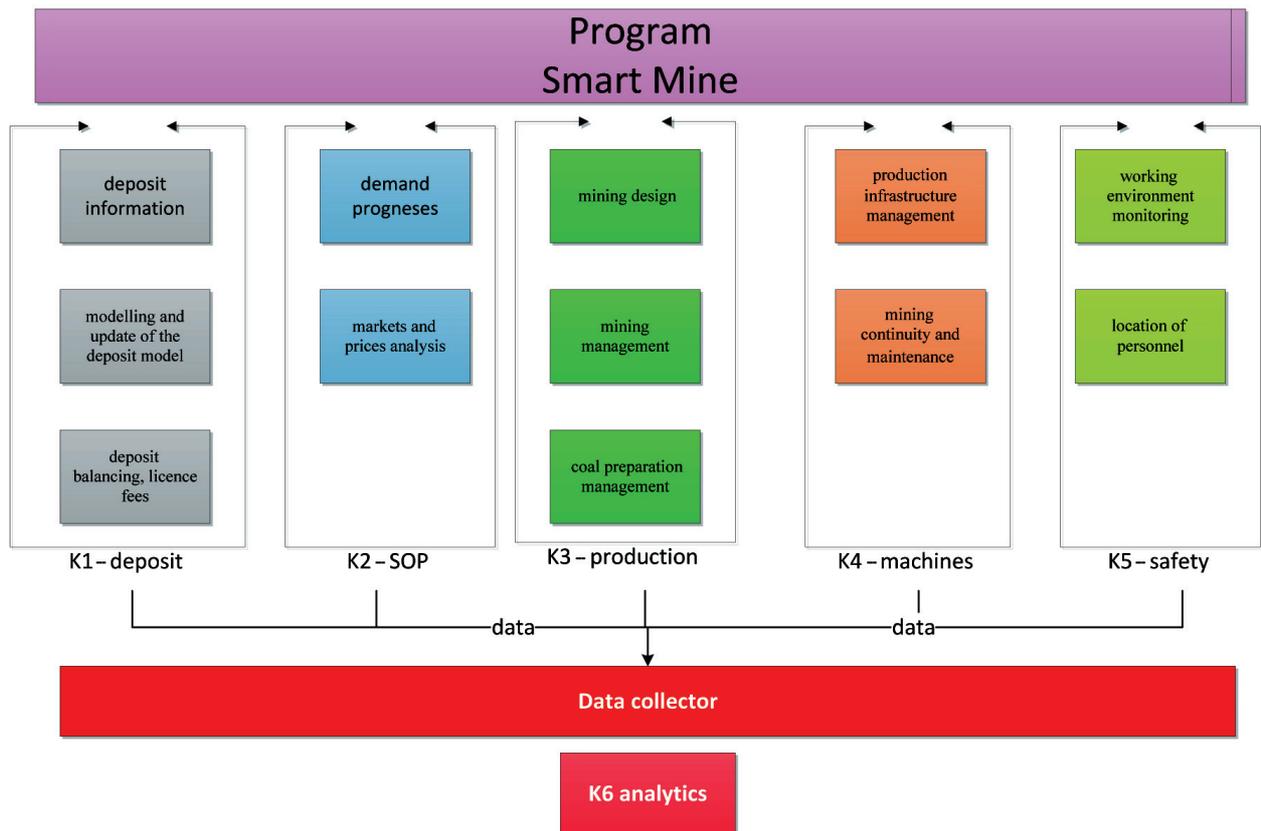


Fig. 4. Components and business processes of Smart Mine Program

Once the model of the processes is worked out by the project team, it should be accepted by the steering committee and taken up as the reference model. This model will determine the working range of the functional component developers. It will also be the basis for the constant development and improvement of the program.

The use of the business process reference model for mining production will enable us to fulfill the requirements in the range of corporate business interoperability.

The program's implementation is expected to bring the following results:

- increasing competence and efficiency in mining production management by synchronizing operations within the supply chain (from deposit management to coal shipment from the mine),
- giving access to tools for the rational management of resources and deposits by implementing complex planning procedures (from short-time schedules to multi-annual plans) and operation monitoring,
- reducing production costs and ensuring safe and proper working conditions by online analyses and monitoring of the operations,

- higher work efficiency by providing better air-conditioning parameters (temperature, dust concentration) in excavations,
- better work safety, for example, by limiting the time of the personnel's presence in particularly hazardous places (use of the Internet of things).

The expected financial effect of the program is a 5% reduction in the operational costs of processes in the realm of production and safety.

#### 4. TECHNICAL ANALYSIS SYSTEM

With respect to the costs, complexity, and required preparation work for implementing the Mining Digitization Program, it is proposed to first start a project whose final product will be an analytical system that makes use of the data from systems currently exploited in the mines. This project will be based on the experience and competence of the CNP EMAG specialists. The developed system, called the Technical Analyses System (TAS), will result from carrying out the assumptions of the analytical component of the Smart Mine Program.

Using the data from gas measurement, geophysics, minerals quality analysis, monitoring machines, and systems for locating people and devices, it will be possible to efficiently prepare and implement the first component of the program.

#### 4.1. Source data of TAS system

It was assumed that the first stage of TAS system development would be oriented towards collecting, processing, and analyzing the structured data coming from gas measurement, geophysics, and machine-monitoring systems.

The key issue of the project in the first phase of TAS development is to work out a solution that would support the identification and evaluation of hazard levels in the mining environment, with respect to air composition and seismic events occurring in underground excavations.

The changing atmospheric parameters in mining excavations have to be controlled in terms of the so-called mining gas concentration and air flow. The parameters are continuously monitored by means of automatic gas measurement systems equipped with measurement sensors, data concentrators, and execution units. The data is transferred to surface supervision systems through data transmission systems.

Polish coal mines are estimated to have more than 4500 methane meters (average per mine: 120–150) with data registration. This number depicts the scale and complexity of the issue.

The seismic systems that are employed in Polish mines enable us to locate seismic events and determine the parameters of rock burst epicenters. Being familiar with the seismic parameters and layout of the measurement network makes it possible to use different algorithms of velocity and damping passive tomography. In tomography algorithms, the natural seismic phenomena invoked by mining exploitation are used. The system is equipped with software to perform passive tomography by means of probabilistic inversion. The credibility of the achieved results depends to a large extent on the number of bursts and their spatial layout.

The systems used in mines ensure the registration of data and messages in local databases. The databases are copied into several archives and used in monitoring and warning domain systems.

Taking into account the available measurement data from mining monitoring systems, it is suggested

that such a TAS system should be developed that will extend the range of information use for business purposes. The system will be supplied with data acquired from mining systems for the monitoring and registration of technical data.

TAS will store a huge amount of data from gas and seismic monitoring systems. Hundreds of devices installed in the mines measure and monitor the methane concentration in the air (many online measurements), coal dust concentration, and the concentration of CO, CO<sub>2</sub>, H<sub>2</sub>S, NO<sub>2</sub>, and O<sub>2</sub> gases. In addition, the devices measure the velocity of air flow in order to assess the working conditions of the ventilation equipment, humidity, air temperature, rock temperature, equivalent temperature, or atmospheric pressure.

Similarly, measurement data is collected from several dozen two- and three-element seismometers and geophones. The data goes to supervisors – experts who supervise rock bursts in mines.

The TAS system will store a great amount of information in the realm of monitoring the operations and the technical conditions of the machines and devices. For example, in the PGG mining corporation, it would be necessary to collect data for:

- 8000 powered support units,
- 47 cutter loaders,
- 88 heading machines,
- 1300 transport systems,
- 270 underground trains.

The data from these measurements will be information input to the TAS system. TAS will also be provided with data acquired from external systems. It is assumed that the national European Plate Observing System (EPOS) will ensure complex unified data from particular domains (e.g., seismological, land surveying, and geological data) [7].

In the next phase of the TAS system development, there will be solutions developed to collecting, processing, and analyzing unstructured data, such as:

- geological maps,
- mining documentation (historical data),
- data generated by measurement and automation systems,
- location data generated by mobile devices for positioning people and machines,
- data from the Internet,
- photographs and scans,
- data from other systems.

It is important to stress that the data collected in TAS will be characterized by a huge quantity and changeability in time as well as inestimable business value that can be obtained by analytics and reasoning.

The detailed range of the source data will be defined in the course of the project.

#### 4.2. TAS system technology

It was assumed that the TAS system should collect both structured and unstructured data coming from mining technical systems and external data sources (e.g., EPOS). The storing, processing, and analytical tools of the system should enable us to acquire concrete information from this data, which is crucial for raising the efficiency of the business processes in a mining corporation.

First, the TAS system will be developed based on the Business Intelligence (BI) technology. The structure of such a system is presented in Figure 5. The developed analytical solution should enable advanced analyses and the application of prognostic methods.

Then, the range of the source data will be extended by unstructured data. This will require an extension of TAS by a new technology, according to the diagram in Figure 6. The Big Data technology will be applied.

The use of unstructured data makes it necessary to check whether it is possible to apply the Hadoop framework (open-source software) to develop one's own analytical environment that works with this sort of massive mining data. The work will be carried out with a view to developing a method of data linking in different formats and structures so it would be possible to identify the currently invisible relationships and dependencies. Based on the commonly used BI technology, it is not possible to process this type of unstructured data in a reasonable amount of time due to the lack of specialized analytical machines adapted to the expected size of the data sets and specific features of the analyzed mining issues.

The structure of the TAS solution includes a source data layer and layer of transactional data from measurement and monitoring systems. This data will be cleaned, integrated, and adapted to the requirements of a data workhouse with the use of the Extract, Transfer, and Load (ETL) requirements. In the proposed solution, it is assumed that the data will be loaded to the corporate data warehouse. The data in the warehouse comes from many sources, but it will be integrated and set as read-only. In case the data warehouse is significantly overcrowded with data (and to make the analytical work more efficient), data marts may be created.

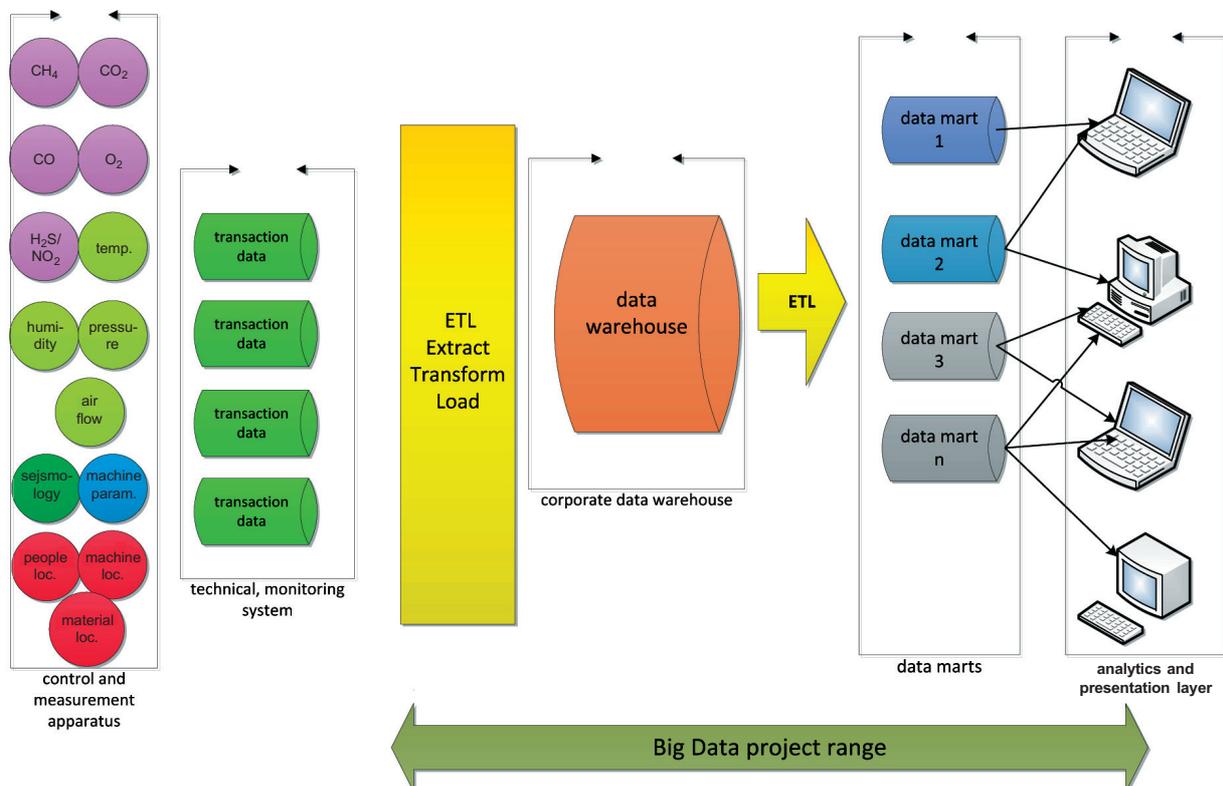


Fig. 5. TAS system in BI technology

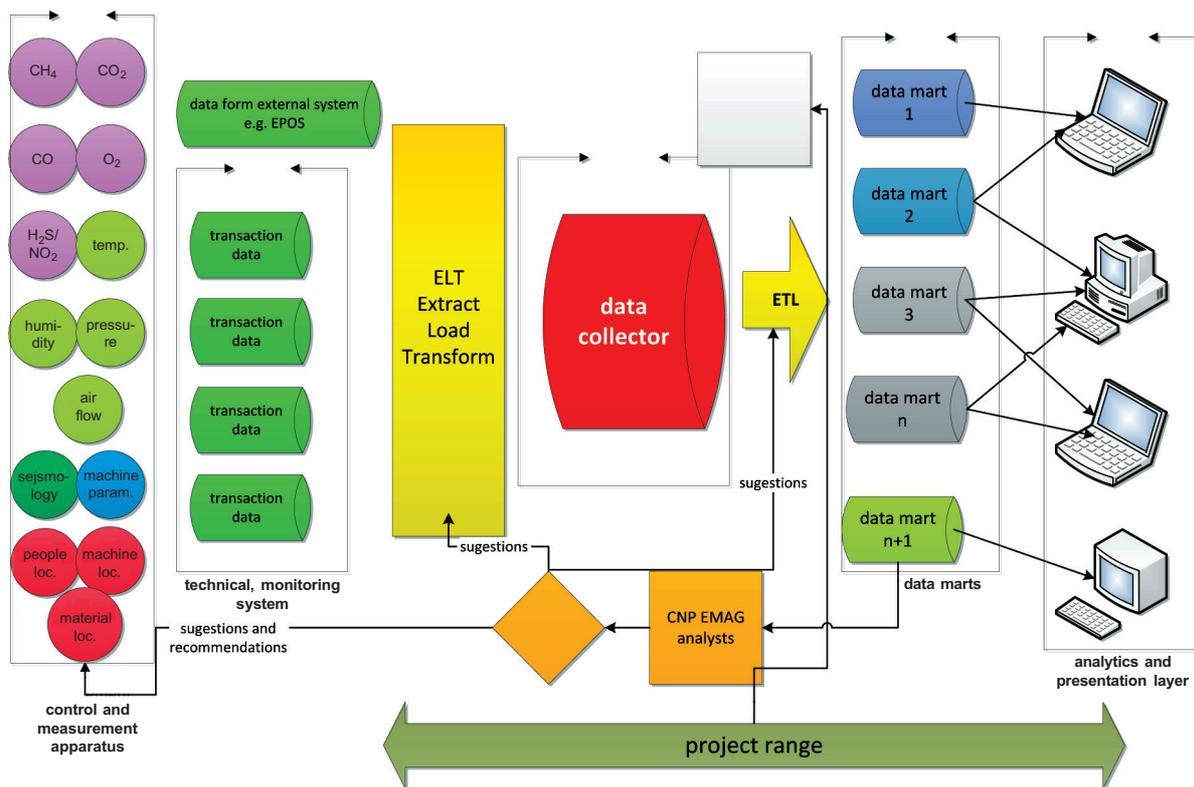


Fig. 6. TAS system in Big Data technology

There are two structures recommended for data storage in data marts:

- Database data mart – one dimensional base. Data processing and aggregation in an application (e.g., for reporting),
- Multi-dimensional structure – in the multi-dimensional structure, the data is ready for Online Analytical Processing (OLAP).

In the TAS system, data mining will be used to search for trends and dependencies. The technological solution based on the ELT process and data collector can be seen in Figure 6.

Data mining methods should enable us to identify cause-and-effect relationships that cannot currently be identified by means of proper technologies due to the huge amount of data to analyze. This will allow us to eliminate hazards in the mine and raise the efficiency of the business processes. The predictive model is usually based on historical data acquired from a data warehouse. The data is analyzed in the analytical module. However, the data needed for real-time prognoses must be available online, not in the periods resulting from the warehouse update cycles. Then, it is necessary to use the ELT (Extract, Load, Transform) process instead of ETL (Extract, Transform, Load) and to load source data straight to the data collector or data mart linked directly to the prediction support module.

The use of ELT is justified for saving and storing unstructured data in the TAS system collector according to the recommendations for the Big Data technology.

To develop TAS with the use of a technology applied in big data systems, it will be required to check whether it is justified to apply the following:

- MapReduce concept – Big Data platform – available in Hadoop/Apache Software Foundation, SAP HANA,
- Database (NoSQL), Apache Hbase – to save data streams,
- software to analyze huge sets of unstructured data – Apache Hadoop, SAP HANA (identifying dependencies and relationships for data in different formats and structures).

#### 4.3. TAS system analytics

The TAS system should provide tools for the following:

- automatic reporting,
- data search and filtering,
- ad hoc analyses,
- data mining – drill-down, roll-up, drill-across, drill-through,
- construction of predictive models,
- file export to Excel.

The possibility of exporting selected data files to Excel should meet the expectations of those analysts for whom Excel is the basic tool for analytical work.

Data mining will be widely used in TAS to search for trends and dependencies. The assessment of measurement results and the credibility of the analyzed data must be carried out with respect to the probable dynamics of changes in the measured quantity. This allows us to recognize the measurement result as credible or incredible. It is necessary to define rule and measurement assessment criteria so that the verification of the conducted evaluation accuracy could be possible only on the basis of the further progress of the process. In many cases (particularly those related to hazards), such an assessment must be made in real time. This situation imposes the quick reaction of the analytical system. The system associates the results of online measurements with historical data and works according to mining regulations. The collection of measurement data by the system and its frequency will be recommended for the measured quantities. Within this task, the applied rules of measurement aggregation will be verified. This refers to cases when a single measurement result represents the value of the measured quantity in a given period of time that is longer than the acquisition of measurement data (aggregation periods should result from mining practices and regulations).

Predictive modeling allows us to predict future results, estimate risk, assess the situation, and manage the processes in a general sense. Statistical analysis of representative portions of information available in the TAS system can improve the velocity and quality of the statistical predictive model's development.

Within the project, it would be necessary to select a predictive method for processes covered by the prediction. With quantitative predictive methods, it is possible to use such models as time series, econometrics, and cohort analysis with leading variables.

Qualitative methods are based on expert opinions and are formulated on the basis of data on the development of the variable predictive value and explanatory variables in the future.

A predictive method should be selected on the basis of the assumed prerogatives and available historical data. At the current stage of defining the range of the research project, one can recommend quantitative methods based on time series. However, with better predictive experience and a greater amount of

unstructured data, it will be possible to use qualitative methods. The model's development will be supported by the prediction support module. In the period when the prognoses are used, it is necessary to assess their accuracy by means of ex-post errors. The prediction results will be presented in tables and predictive value diagrams. The predictive module should be supplied with real values that can be compared with the prognosis.

#### 4.4. Data Analysis Center

The analytical component of the TAS system will process the collected information and enable reasoning based on the implemented models.

TAS should be treated as an auxiliary tool in the decision-making processes related to technical issues.

It is assumed that the development and implementation of the Smart Mine Program products (in particular, the implementation of the TAS system) will be related to the start of the Data Analysis Center (DAC). DAC will conduct advanced analyses of data collected from monitoring the process of mining production and the working conditions of the miners.

DAC will require work performed by experts from different organizations (universities, research institutes, State Mining Authority, mining companies) with adequate knowledge of the subject.

Today's ICT technologies enable remote access to data and remote real-time monitoring of processes by distributed teams of analysts.

The analysts of DAC should:

- be able to conduct analyses of Big Data sets with structured and unstructured data,
- understand the behavior of machines as well as measurement networks and systems to identify unusual/atypical events and cases without generating false alarms,
- be able to model prognoses and simulations,
- be able to interpret the results and prognoses in light of domain knowledge, knowledge of processes, and regulations.

The DAC Center will offer expert services (analyses, modeling, prediction) for Big Data. The services will be calculated on the basis of a billing system that will register the performed work. The relationships between DAC and TAS can be seen in Figure 6.

## 5. CONCLUSIONS

The concept of the gradual digitization of the Polish mining industry discussed in the article is an attempt to propose a complex solution to support the management, production, and safety processes in mines. The solution will allow us to optimize the use of machines and devices in the production cycle as well as plan renovations and investments with high accuracy. It will also improve work safety in underground mines. A system-based approach to production and safety management with respect to quantitative and qualitative economic aspects is particularly important for Polish mining, which has been undergoing restructuring processes for years.

A good example of the first stage of a mine digitization is the One Control Room concept in the Polkowice-Sieroszowice copper mine (a part of the KGHM corporation). This concept is a new approach to data acquisition and processing. It enables the remote control of the production and maintenance processes and offers a proactive approach to the maintenance of systems, which ensure lower exploitation costs and better quality of the final product [8].

Due to the fact that processing bigger and bigger data sets has become something common in business, it is necessary to perform the next stage of mining digitization; i.e., developing a system for Big Data analyses along with a data analysis center. Finding the dependencies and correlations between the data coming from different areas of basic and supporting processes in a mine will become a perfect source of management and maintenance information. It will also allow us to impact the production process and quality of the final product required by the customer. Another equally

important element is the method of presenting the above information with respect to the perceptive abilities of production management personnel.

### References

- [1] Kozłowski A., Wojtas P.: *Systemowe podejście do cyfryzacji w procesach technologicznych w górnictwie*, "Szkoła Eksploatacji Podziemnej", Kraków 2017.
- [2] Kozłowski A.: *Bezpieczeństwo procesów technologicznych w ujęciu systemowym. Zintegrowany system zarządzania Silesia+*, Kongres Innowacji Polskich, Kraków 2015.
- [3] Stach R., Borkowski L.: *One control room w ZG Polkowice-Sieroszowice*, IMF, Jastrzębie-Zdrój 2017.
- [4] Kozłowski A., Wojtas P.: *Możliwość optymalizacji procesów technologicznych zakładu górniczego w kontekście cyfryzacji górnictwa*, Polski Kongres Górniczy, Kraków 2017.
- [5] Goleń A., Gałuszka J., Wojtas P., Wojtas M.: *Studium Wykonalności Programu Cyfrowa Kopalnia/ Smart Mine*, opracowanie własne CNP EMAG S.A., Katowice 2017.
- [6] Wojtas P., Goleń A.: *Optymalizacja procesów wydobywczych poprzez cyfryzację kopalni*, IMF, Jastrzębie-Zdrój 2017.
- [7] *European Research Infrastructure on Solid Earth* – <https://www.epos-ip.org/>.
- [8] Andrzejewski M., Borkowski L.: *Kierunki rozwoju monitoringu pracy maszyn i urządzeń górniczych w KGHM "Polska Miedz" S.A.*, "Wiadomości Górnicze" 2014, 10.

*PIOTR WOJTAS, Ph.D., Eng.  
Science and Industrial Centre EMAG Inc.  
ul. Karoliny 4, 40-186 Katowice, Poland  
piotr.wojtas@cnp-emag.pl*

*ARTUR KOZŁOWSKI, Ph.D., Eng.  
Institute of Innovative Technologies EMAG  
ul. Leopolda 31, 40-189 Katowice, Poland  
artur.kozlowski@ibemag.pl*

*MAREK WOJTAS, M.Sc.  
Telvis Ltd.  
ul. Karoliny 4, 40-186 Katowice, Poland  
marek.wojtas@telvis.pl*